

Multiviewer with KVM

TK UHD Series



INTRODUCTION


TK-UHD is a multiviewer 4in 1out with KVM. The main function is to convert the 4 HDMI signals input to the multiviewer into one HDMI signal output, so that 4 digital signals are displayed on a UHD display unit at the same time.

FEATURES

- Supports four-split, left-right two-split, up-down two-split, full-screen display modes;
- 4 x HDMI signal input, HDMI signal embedded audio;
- 1 x HDMI output, HDMI signal embedded audio, support signal output with maximum resolution of 3840 * 2160@60Hz; Support 3.5mm audio interface output;
- In split mode, the audio and kvm follows the mouse movement to switch;
- Support seamless switching of the second-cut function, all single-screen or different split modes switch without black screen; Support chassis button, infrared remote control, and keyboard hotkey control functions;

TK Series

DIAGRAM

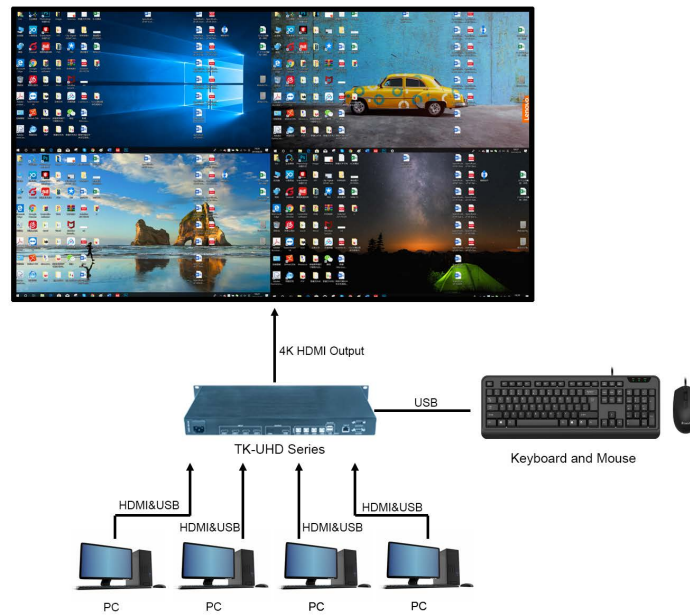

SPECIFICATION

Product Hardware Information	System Structure	Pure Hardware Architecture
	Operating System	No Operating System
Input/Output Signal	Input Interface	4 x HDMI1.4, 4 x USB
	Input Resolution	Up to 3840 x 2160@30Hz
	Output Interface	1 x HDMI2.0, 1 x 3.5mm audio interface, 2 x USB
	Output Resolution	Up to 3840 x 2160@60Hz
Image Processing	Color	24bit, 16.77 million colors
	Splicing Mode	1 x 2, 2 x 2, 1 x 2, full screen
Control	Control Method	Chassis Button, Remote Control, Keyboard Hot Keys
Stability	Safety	Hardware Structure, No Virus Interference
	Continuity	365 Days, 7 X 24 Hours Operation
Electrical Parameters	Voltage	90~260V
	Power	<15W
Package	Product Size	435mm(L) x 45mm(W) x 240mm(H)
	Product Weight	1.45KG
	Package Size	510mm(L) x 130mm(W) x 345mm(H)
	Gross Weight	3.1KG